


## FS 2CO

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany



www.weidmueller.com

## Product image



Relay sockets for the D-SERIES DRM relays

- 2 and 4 CO contacts
- Screw and PUSH IN connection
- Standard and low heights

## General ordering data

|            |   |
|------------|---|
| Version    | D-SERIES DRM, Relay socket, Number of contacts: 2, CO contact, Continuous current: 12 A, Screw connection |
| Order No.  | <a href="#">7760056106</a>  |
| Type       | FS 2CO  |
| GTIN (EAN) | 4032248855582   |
| Qty.       | 10 pc(s).   |

Creation date March 12, 2022 11:12:42 AM CET

Teslakala.com

Catalogue status 11.02.2022 / We reserve the right to make technical changes.

## FS 2CO

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|            |         |                 |            |
|------------|---------|-----------------|------------|
| Depth      | 28.9 mm | Depth (inches)  | 1.138 inch |
| Height     | 69.8 mm | Height (inches) | 2.748 inch |
| Width      | 24.7 mm | Width (inches)  | 0.972 inch |
| Net weight | 33.5 g  |                 |            |

## Temperatures

|                     |                |                       |                |
|---------------------|----------------|-----------------------|----------------|
| Storage temperature | -40 °C...70 °C | Operating temperature | -40 °C...70 °C |
|---------------------|----------------|-----------------------|----------------|

## Environmental Product Compliance

|            |                |
|------------|----------------|
| REACH SVHC | Lead 7439-92-1 |
|------------|----------------|

## Rated data UL

|                         |         |
|-------------------------|---------|
| Certificate No. (cURus) | E312083 |
|-------------------------|---------|

## Load side

|                            |          |                    |              |
|----------------------------|----------|--------------------|--------------|
| Rated switching voltage    | 250 V AC | Continuous current | 12 A         |
| Max. switching voltage, AC | 300 V    | Contact type       | 2 CO contact |

## General data

|                                    |                          |                |  |
|------------------------------------|--------------------------|----------------|--|
| Version                            | flat design              |                |  |
| Rail                               | TS 35                    |                |  |
| Colour                             | black                    |                |  |
| UL94 flammability rating component | Component                | Housing        |  |
|                                    | UL94 flammability rating | V-2            |  |
|                                    | Component                | Mounting foot  |  |
|                                    | UL94 flammability rating | HB             |  |
|                                    | Component                | Retaining clip |  |
|                                    | UL94 flammability rating | HB             |  |

## Insulation coordination

|   |                             |  |                             |
|---|-----------------------------|--|-----------------------------|
| Pollution severity  | 2                           | Surge voltage category                           | II                          |
| Clearance and creepage distances for control side - load side | ≥ 4 mm                      | Dielectric strength for control side - load side | 2 kV <sub>eff</sub> / 1 min |
| Dielectric strength of neighbouring contacts                  | 2 kV <sub>eff</sub> / 1 min | Impulse withstand voltage                        | 4 kV (1.2/50 μs)            |
| Protection degree   | IP10                        |  |                             |

## Further details of approvals / standards

|           |  |                         |         |
|-----------|--|-------------------------|---------|
| Standards | EN 60664-1:2007,<br>EN 61000-6-2:2005,<br>EN 61000-6-4:2007 +<br>A1:2011, UL 508 | Certificate No. (cURus) | E312083 |
|-----------|--|-------------------------|---------|

## FS 2CO

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Connection data

|   |                                 |   |                     |
|---|---------------------------------|---|---------------------|
| Wire connection method  | Screw connection                | Stripping length, rated connection  | 7 mm                |
| Tightening torque, min.   | 0.5 Nm                          | Tightening torque, max.   | 0.8 Nm              |
| Clamping range, min.  | 0.5 mm <sup>2</sup>             | Clamping range, max.  | 2.5 mm <sup>2</sup> |
| Wire cross-section, solid, min.   | 0.5 mm <sup>2</sup>             | Wire cross-section, solid, max.   | 2.5 mm <sup>2</sup> |
| Wire connection cross section, finely stranded, min.                                    | 0.5 mm <sup>2</sup>             | Wire connection cross section, finely stranded, max.                                    | 2.5 mm <sup>2</sup> |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min. | 0.5 mm <sup>2</sup>             | Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max. | 1.5 mm <sup>2</sup> |
| Conductor cross-section, flexible, AEH (DIN 46228-1), min.                              | 0.5 mm <sup>2</sup>             | Conductor cross-section, flexible, AEH (DIN 46228-1), max.                              | 1.5 mm <sup>2</sup> |
| Wire connection   | M3 forked cable lug (insulated) | Blade size  | size PH1            |

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC001456    | ETIM 7.0    | EC001456    |
| ETIM 8.0    | EC001456    | ECLASS 9.0  | 27-37-16-03 |
| ECLASS 9.1  | 27-37-16-03 | ECLASS 10.0 | 27-37-16-03 |
| ECLASS 11.0 | 27-37-16-03 |             |             |

## Important note

Product information For this socket, a cross connection is not available.

## Approvals

Approvals



|                       |         |
|-----------------------|---------|
| ROHS                  | Conform |
| UL File Number Search | E312083 |

## Downloads

|   |   |
|---|---|
| Approval/Certificate/Document of Conformity | <a href="#">EU Konformitätserklärung / EU Declaration of Conformity</a> |
| Engineering Data                            | <a href="#">CAD data – STEP</a>   |
| Engineering Data                            | <a href="#">EPLAN, WSCAD, Zuken E3.S</a>                                |
| Catalogues                                  | <a href="#">Catalogues in PDF-format</a>                                |
| Brochures                                   |   |


**FS 2CO**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany


[www.weidmueller.com](http://www.weidmueller.com)

**Drawings**

**Wiring diagram**

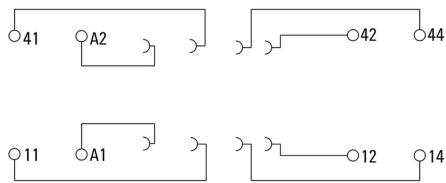

**Dimensional drawing**

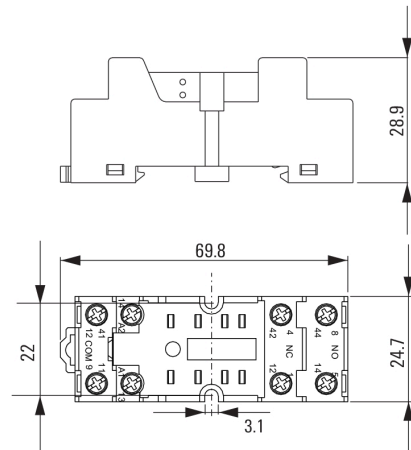

## FS 2CO

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Mating connector (fully pluggable)

## with LED



Individual relays within the D-SERIES DRM

- 2 CO contacts
- AC coils
- With integrated status LED

## General ordering data

| Type       | DRM270730L AU              | Version   |
|------------|----------------------------|---|
| Order No.  | <a href="#">7760056184</a> | D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi gold-plated, Rated control voltage: 230 V AC, Continuous current: 10 A, Plug-in connection |
| GTIN (EAN) | 4032248922239              |   |
| Qty.       | 20 pc(s).                  |   |
| Type       | DRM270024L AU              | Version   |
| Order No.  | <a href="#">7760056183</a> | D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi gold-plated, Rated control voltage: 24 V DC, Continuous current: 10 A, Plug-in connection  |
| GTIN (EAN) | 4032248922222              |   |
| Qty.       | 20 pc(s).                  |   |

## with LED and free-wheel diode



Individual relays within the D-SERIES DRM

- 2 CO contacts
- DC coils
- With integrated status LED and free-wheeling diode

## General ordering data

| Type       | DRM270024LD                | Version  |
|------------|----------------------------|--|
| Order No.  | <a href="#">7760056077</a> | D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash gold-plated, Rated control voltage: 24 V DC, Continuous current: 10 A, Plug-in connection |
| GTIN (EAN) | 4032248855780              |  |
| Qty.       | 20 pc(s).                  |  |
| Type       | DRM270024LD                | Version  |
| Order No.  | <a href="#">7760056124</a> | D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash gold-plated, Rated control voltage: 24 V DC, Continuous current: 10 A, Plug-in connection |
| GTIN (EAN) | 4032248855544              |  |
| Qty.       | 20 pc(s).                  |  |

## FS 2CO

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Mating connector (fully pluggable)

## with LED



Relay from the D-SERIES DRE.

- 2 or 4 CO contacts
- Compact design
- Wide range of coil voltages
- Integrated with test button (AC red, DC blue)
- Integrated with status display (AC red, DC green) and/or free-wheel diode

## General ordering data

|            |                            |   |
|------------|----------------------------|---|
| Type       | DRE270615L                 | Version   |
| Order No.  | <a href="#">7760054278</a> | D-SERIES DRE, Relay, Number of contacts: 2, CO contact, Ag alloy, |
| GTIN (EAN) | 6944169719868              | Rated control voltage: 115 V AC, Continuous current: 5 A, Plug-in |
| Qty.       | 20 pc(s).                  | connection  |
| Type       | DRE270730L                 | Version   |
| Order No.  | <a href="#">7760054279</a> | D-SERIES DRE, Relay, Number of contacts: 2, CO contact, Ag alloy, |
| GTIN (EAN) | 6944169719875              | Rated control voltage: 230 V AC, Continuous current: 5 A, Plug-in |
| Qty.       | 20 pc(s).                  | connection  |
| Type       | DRE270548L                 | Version   |
| Order No.  | <a href="#">7760054277</a> | D-SERIES DRE, Relay, Number of contacts: 2, CO contact, Ag alloy, |
| GTIN (EAN) | 6944169719851              | Rated control voltage: 48 V AC, Continuous current: 5 A, Plug-in  |
| Qty.       | 20 pc(s).                  | connection  |
| Type       | DRE270048L                 | Version   |
| Order No.  | <a href="#">7760054274</a> | D-SERIES DRE, Relay, Number of contacts: 2, CO contact, Ag alloy, |
| GTIN (EAN) | 6944169719820              | Rated control voltage: 48 V DC, Continuous current: 5 A, Plug-in  |
| Qty.       | 20 pc(s).                  | connection  |
| Type       | DRE270110L                 | Version   |
| Order No.  | <a href="#">7760054275</a> | D-SERIES DRE, Relay, Number of contacts: 2, CO contact, Ag alloy, |
| GTIN (EAN) | 6944169719837              | Rated control voltage: 110 V DC, Continuous current: 5 A, Plug-in |
| Qty.       | 20 pc(s).                  | connection  |
| Type       | DRE270524L                 | Version   |
| Order No.  | <a href="#">7760054276</a> | D-SERIES DRE, Relay, Number of contacts: 2, CO contact, Ag alloy, |
| GTIN (EAN) | 6944169719844              | Rated control voltage: 24 V AC, Continuous current: 5 A, Plug-in  |
| Qty.       | 20 pc(s).                  | connection  |
| Type       | DRE270024L                 | Version   |
| Order No.  | <a href="#">7760054273</a> | D-SERIES DRE, Relay, Number of contacts: 2, CO contact, Ag alloy, |
| GTIN (EAN) | 6944169719813              | Rated control voltage: 24 V DC, Continuous current: 5 A, Plug-in  |
| Qty.       | 20 pc(s).                  | connection  |
| Type       | DRE270012L                 | Version   |
| Order No.  | <a href="#">7760054272</a> | D-SERIES DRE, Relay, Number of contacts: 2, CO contact, Ag alloy, |
| GTIN (EAN) | 6944169719806              | Rated control voltage: 12 V DC, Continuous current: 5 A, Plug-in  |
| Qty.       | 20 pc(s).                  | connection  |

## FS 2CO

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Mating connector (fully pluggable)

## with LED and test button



Individual relays within the D-SERIES DRM

- 2 CO contacts
- AC coils
- With integrated status LED and test button

## General ordering data

| Type       | DRM270730LT AU             | Version   |
|------------|----------------------------|---|
| Order No.  | <a href="#">7760056186</a> | D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi gold-plated, Rated control voltage: 230 V AC, Continuous current: 10 A, Plug-in connection |
| GTIN (EAN) | 4032248922253              |   |
| Qty.       | 20 pc(s).                  |   |
| Type       | DRM270024LT AU             | Version   |
| Order No.  | <a href="#">7760056185</a> | D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi gold-plated, Rated control voltage: 24 V DC, Continuous current: 10 A, Plug-in connection  |
| GTIN (EAN) | 4032248922246              |   |
| Qty.       | 20 pc(s).                  |   |

## standard relay



Individual relays within the D-SERIES DRM

- 2 CO contacts
- Optional AC or DC coils

## General ordering data

| Type       | DRM270012                  | Version   |
|------------|----------------------------|---|
| Order No.  | <a href="#">7760056050</a> | D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash gold-plated, Rated control voltage: 12 V DC, Continuous current: 10 A, Plug-in connection  |
| GTIN (EAN) | 4032248856053              |   |
| Qty.       | 20 pc(s).                  |   |
| Type       | DRM270615                  | Version   |
| Order No.  | <a href="#">7760056057</a> | D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash gold-plated, Rated control voltage: 115 V AC, Continuous current: 10 A, Plug-in connection |
| GTIN (EAN) | 4032248855988              |   |
| Qty.       | 20 pc(s).                  |   |
| Type       | DRM270524                  | Version   |
| Order No.  | <a href="#">7760056055</a> | D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash gold-plated, Rated control voltage: 24 V AC, Continuous current: 10 A, Plug-in connection  |
| GTIN (EAN) | 4032248856008              |   |
| Qty.       | 20 pc(s).                  |   |
| Type       | DRM270110                  | Version   |
| Order No.  | <a href="#">7760056053</a> | D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash gold-plated, Rated control voltage: 110 V DC, Continuous current: 10 A, Plug-in connection |
| GTIN (EAN) | 4032248856022              |   |
| Qty.       | 20 pc(s).                  |   |

## FS 2CO

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Mating connector (fully pluggable)

|            |                            |  |
|------------|----------------------------|--|
| Type       | DRM270048                  | Version  |
| Order No.  | <a href="#">7760056052</a> | D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash     |
| GTIN (EAN) | 4032248856039              | gold-plated, Rated control voltage: 48 V DC, Continuous current: 10 A, |
| Qty.       | 20 pc(s).                  | Plug-in connection   |
| Type       | DRM270548                  | Version  |
| Order No.  | <a href="#">7760056056</a> | D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash     |
| GTIN (EAN) | 4032248855995              | gold-plated, Rated control voltage: 48 V AC, Continuous current: 10 A, |
| Qty.       | 20 pc(s).                  | Plug-in connection   |
| Type       | DRM270730                  | Version  |
| Order No.  | <a href="#">7760056058</a> | D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash     |
| GTIN (EAN) | 4032248855971              | gold-plated, Rated control voltage: 230 V AC, Continuous current: 10   |
| Qty.       | 20 pc(s).                  | A, Plug-in connection  |
| Type       | DRM270024                  | Version  |
| Order No.  | <a href="#">7760056051</a> | D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash     |
| GTIN (EAN) | 4032248856046              | gold-plated, Rated control voltage: 24 V DC, Continuous current: 10 A, |
| Qty.       | 20 pc(s).                  | Plug-in connection   |
| Type       | DRM270220                  | Version  |
| Order No.  | <a href="#">7760056054</a> | D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash     |
| GTIN (EAN) | 4032248856015              | gold-plated, Rated control voltage: 220 V DC, Continuous current: 10   |
| Qty.       | 20 pc(s).                  | A, Plug-in connection  |

## with LED and test button



Individual relays within the D-SERIES DRM

- 2 CO contacts
- AC coils
- With integrated status LED and test button

## General ordering data

|            |                            |  |
|------------|----------------------------|--|
| Type       | DRM270012LT                | Version  |
| Order No.  | <a href="#">7760056068</a> | D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash     |
| GTIN (EAN) | 4032248855872              | gold-plated, Rated control voltage: 12 V DC, Continuous current: 10 A, |
| Qty.       | 20 pc(s).                  | Plug-in connection   |
| Type       | DRM270524LT                | Version  |
| Order No.  | <a href="#">7760056073</a> | D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash     |
| GTIN (EAN) | 4032248855827              | gold-plated, Rated control voltage: 24 V AC, Continuous current: 10 A, |
| Qty.       | 20 pc(s).                  | Plug-in connection   |
| Type       | DRM270615LT                | Version  |
| Order No.  | <a href="#">7760056075</a> | D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash     |
| GTIN (EAN) | 4032248855803              | gold-plated, Rated control voltage: 115 V AC, Continuous current: 10   |
| Qty.       | 20 pc(s).                  | A, Plug-in connection  |
| Type       | DRM270220LT                | Version  |
| Order No.  | <a href="#">7760056072</a> | D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash     |
| GTIN (EAN) | 4032248855834              | gold-plated, Rated control voltage: 220 V DC, Continuous current: 10   |
| Qty.       | 20 pc(s).                  | A, Plug-in connection  |



## FS 2CO

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

www.weidmueller.com

## Mating connector (fully pluggable)

|            |                            |  |
|------------|----------------------------|--|
| Type       | DRM270110LT                | Version  |
| Order No.  | <a href="#">7760056071</a> | D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash     |
| GTIN (EAN) | 4032248855841              | gold-plated, Rated control voltage: 110 V DC, Continuous current: 10   |
| Qty.       | 20 pc(s).                  | A, Plug-in connection  |
| Type       | DRM270024LT                | Version  |
| Order No.  | <a href="#">7760056069</a> | D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash     |
| GTIN (EAN) | 4032248855865              | gold-plated, Rated control voltage: 24 V DC, Continuous current: 10 A, |
| Qty.       | 20 pc(s).                  | Plug-in connection   |
| Type       | DRM270048LT                | Version  |
| Order No.  | <a href="#">7760056070</a> | D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash     |
| GTIN (EAN) | 4032248855858              | gold-plated, Rated control voltage: 48 V DC, Continuous current: 10 A, |
| Qty.       | 20 pc(s).                  | Plug-in connection   |
| Type       | DRM270548LT                | Version  |
| Order No.  | <a href="#">7760056074</a> | D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash     |
| GTIN (EAN) | 4032248855810              | gold-plated, Rated control voltage: 48 V AC, Continuous current: 10 A, |
| Qty.       | 20 pc(s).                  | Plug-in connection   |
| Type       | DRM270730LT                | Version  |
| Order No.  | <a href="#">7760056076</a> | D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash     |
| GTIN (EAN) | 4032248855797              | gold-plated, Rated control voltage: 230 V AC, Continuous current: 10   |
| Qty.       | 20 pc(s).                  | A, Plug-in connection  |

## with LED and free-wheel diode



Relay from the D-SERIES DRE.

- 2 or 4 CO contacts
- Compact design
- Wide range of coil voltages
- Integrated with test button (AC red, DC blue)
- Integrated with status display (AC red, DC green) and/or free-wheel diode

## General ordering data

|            |                            |   |
|------------|----------------------------|---|
| Type       | DRE270024LD                | Version   |
| Order No.  | <a href="#">7760054280</a> | D-SERIES DRE, Relay, Number of contacts: 2, CO contact, Ag alloy, |
| GTIN (EAN) | 6944169719882              | Rated control voltage: 24 V DC, Continuous current: 5 A, Plug-in  |
| Qty.       | 20 pc(s).                  | connection  |

## FS 2CO

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Mating connector (fully pluggable)

## with LED



Individual relays within the D-SERIES DRM

- 2 CO contacts
- AC coils
- With integrated status LED

## General ordering data

|            |                            |  |
|------------|----------------------------|--|
| Type       | DRM270524L                 | Version  |
| Order No.  | <a href="#">7760056064</a> | D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash     |
| GTIN (EAN) | 4032248855919              | gold-plated, Rated control voltage: 24 V AC, Continuous current: 10 A, |
| Qty.       | 20 pc(s).                  | Plug-in connection   |
| Type       | DRM270730L                 | Version  |
| Order No.  | <a href="#">7760056067</a> | D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash     |
| GTIN (EAN) | 4032248855889              | gold-plated, Rated control voltage: 230 V AC, Continuous current: 10   |
| Qty.       | 20 pc(s).                  | A, Plug-in connection  |
| Type       | DRM270615L                 | Version  |
| Order No.  | <a href="#">7760056066</a> | D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash     |
| GTIN (EAN) | 4032248855896              | gold-plated, Rated control voltage: 115 V AC, Continuous current: 10   |
| Qty.       | 20 pc(s).                  | A, Plug-in connection  |
| Type       | DRM270024L                 | Version  |
| Order No.  | <a href="#">7760056060</a> | D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash     |
| GTIN (EAN) | 4032248855957              | gold-plated, Rated control voltage: 24 V DC, Continuous current: 10 A, |
| Qty.       | 20 pc(s).                  | Plug-in connection   |
| Type       | DRM270548L                 | Version  |
| Order No.  | <a href="#">7760056065</a> | D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash     |
| GTIN (EAN) | 4032248855902              | gold-plated, Rated control voltage: 48 V AC, Continuous current: 10 A, |
| Qty.       | 20 pc(s).                  | Plug-in connection   |
| Type       | DRM270048L                 | Version  |
| Order No.  | <a href="#">7760056061</a> | D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash     |
| GTIN (EAN) | 4032248855940              | gold-plated, Rated control voltage: 48 V DC, Continuous current: 10 A, |
| Qty.       | 20 pc(s).                  | Plug-in connection   |
| Type       | DRM270110L                 | Version  |
| Order No.  | <a href="#">7760056062</a> | D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash     |
| GTIN (EAN) | 4032248855933              | gold-plated, Rated control voltage: 110 V DC, Continuous current: 10   |
| Qty.       | 20 pc(s).                  | A, Plug-in connection  |
| Type       | DRM270220L                 | Version  |
| Order No.  | <a href="#">7760056063</a> | D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash     |
| GTIN (EAN) | 4032248855926              | gold-plated, Rated control voltage: 220 V DC, Continuous current: 10   |
| Qty.       | 20 pc(s).                  | A, Plug-in connection  |
| Type       | DRM270012L                 | Version  |
| Order No.  | <a href="#">7760056059</a> | D-SERIES DRM, Relay, Number of contacts: 2, CO contact, AgNi flash     |
| GTIN (EAN) | 4032248855964              | gold-plated, Rated control voltage: 12 V DC, Continuous current: 10 A, |
| Qty.       | 20 pc(s).                  | Plug-in connection   |

**FS 2CO**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

**Accessories**

**Retaining clips**



Retaining clip for D-SERIES DRM relays  
 • Metal and plastic retaining clip

**General ordering data**

| Type       | DRM/DRL CLIP M             | Version                  |
|------------|----------------------------|--------------------------|
| Order No.  | <a href="#">7760056108</a> | D-SERIES, Retaining clip |
| GTIN (EAN) | 4032248855568              |                          |
| Qty.       | 10 pc(s).                  |                          |

**Crosshead screwdriver Phillips**



Crosshead screwdriver, Phillips, SDK PH DIN 5262, ISO 8764/2-PH, output to ISO 8764-PH, ChromTop tip, SoftFinish grip

**General ordering data**

| Type       | SDK PH1 X 80               | Version                          |
|------------|----------------------------|----------------------------------|
| Order No.  | <a href="#">2749410000</a> | Screwdriver, Blade length: 80 mm |
| GTIN (EAN) | 4050118895636              |                                  |
| Qty.       | 1 pc(s).                   |                                  |

## FS 2CO

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Accessories

## Crosshead screwdriver, Phillips



VDE insulated screwdriver sets, for working on live parts up to 1000 V AC and 1500 V DC, DIN EN 60900. IEC 900. Each piece is "GS" safety tested. Blade made from fully hardened, high-alloy chromium-vanadium-molybdenum steel, gun-metal finish.

## General ordering data

|            |                            |                                    |
|------------|----------------------------|------------------------------------|
| Type       | SDIK SLIM PH1 X 80         | Version                            |
| Order No.  | <a href="#">2749650000</a> | Mounting tool, Blade length: 80 mm |
| GTIN (EAN) | 4050118896398              |                                    |
| Qty.       | 1 pc(s).                   |                                    |

## Crosshead screwdriver Phillips



VDE insulated crosshead screwdriver, for Phillips screws, SDIK PH DIN 7438, ISO 8764/2-PH, output to ISO 8764-PH, SoftFinish grip

## General ordering data

|            |                            |                                  |
|------------|----------------------------|----------------------------------|
| Type       | SDIK PH1 X 80              | Version                          |
| Order No.  | <a href="#">2749890000</a> | Screwdriver, Blade length: 80 mm |
| GTIN (EAN) | 4050118897098              |                                  |
| Qty.       | 1 pc(s).                   |                                  |